

REC'D 09 JUL 2004

IB/2004/051104 NL 030761

WIPO

PCT

Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03102048.0 ✓

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:  
Application no.: 03102048.0  
Demande no:

Anmeldetag:  
Date of filing: 08.07.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Method and device for sensing current

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H02M7/5387

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

## Method and device for sensing current

The present invention relates in general to a method and device for sensing current. Particularly, the present invention relates to a method and device for sensing current in a half-bridge driver, for instance in a switching amplifier. More particularly, the present invention relates to a method and device for sensing current in a switched current path, where  
5 current is periodically switched between an unknown magnitude during a first part of a period and a predetermined fixed magnitude during a second part of the period.

Fig. 1A illustrates a half bridge driver circuit 1 for generating an AC current in  
10 a load L powered from a DC voltage source  $V_{DC}$  having a high voltage terminal 2 and a low voltage terminal 3. The half bridge driver circuit 1 comprises a series arrangement of two controllable switches 11 and 12 arranged between said high voltage terminal 2 ( $V_{HIGH}$ ) and a low voltage terminal 3 ( $V_{LOW}$ ), wherein the first switch 11 is coupled between the high voltage terminal 2 and a node A, and wherein the second switch 12 is coupled between the  
15 low voltage terminal 3 and this node A. The current path between the high voltage terminal 2 and said node A is indicated as first bridge branch 21; the current path between the low voltage terminal 3 and said node A is indicated as second bridge branch 22. Said node A between said switches 11, 12 is coupled to an output terminal 6 via an inductor 4. A capacitor 7 is coupled in parallel to the load L. The switches are usually implemented as MOSFETs, as  
20 illustrated.

A switch driver 13 has output terminals 14 and 15, coupled with control terminals of said switches 11, 12, respectively. In a first operative state, which will be referred to as high state, the switch driver 13 is adapted to generate control signals for said switches 11 and 12 such that the first switch 11 is conductive (ON) while the second switch  
25 12 is non-conductive (OFF); in that case, a current  $I_H$  will flow through the inductor 4 in a direction from the high voltage terminal 2 to the output terminal 6, causing the voltage level at the output terminal 6 to rise. In a second operative state, which will be referred to as low state, the switch driver 13 is adapted to generate control signals for said switches 11 and 12 such that the first switch 11 is non-conductive (OFF) while the second switch 12 is

conductive (ON); in that case, a current  $I_L$  will flow through the inductor 4 in the opposite direction, i.e. in a direction from the output terminal 6 to the low voltage terminal 3, causing the voltage level at the output terminal 6 to drop.

5 The switch driver 13 has an input terminal 16 receiving timing signals, which control the switch driver 13 to be alternating between its high state and its low state. The resulting currents in the inductor 4 and switches 11, 12 are illustrated in the graph of Fig. 1B.

Fig. 1B is a graph illustrating signal shapes. In the coil 4, a triangular current shape  $I_4$  is generated, having a positive slope during the high state of the switch driver 13, and having a negative slope during the low state of the switch driver 13. The maximal current magnitude is indicated as  $I_{MAX}$ , the minimal current magnitude is indicated as  $I_{MIN}$ . This current can be considered as a DC current with DC current magnitude  $I_{DC}$ , indicated as a dotted line, and positive amplitude  $I_{MAX}-I_{DC}$  and negative amplitude  $I_{MIN}-I_{DC}$ .

10 The current  $I_H$  through the first switch 11 has the same magnitude as  $I_4$  during the high state of the switch driver 13, but is zero during the low state of the switch driver 13. Similarly, the current  $I_L$  through the second switch 12 has the same magnitude as  $I_4$  during the low state of the switch driver 13, but is zero during the high state of the switch driver 13.

Circuits like circuit 1 are used in many types of applications, for instance in drivers for gas discharge lamps, motor drivers, DA power inverters, switching amplifiers, etc. The present invention is not restricted to one of such applications, but can be used in any of those applications, and others not mentioned in the above.

20 In general, for instance for control purposes, it is desirable to have a measuring signal representing the current  $I_4$  in the inductor 4.

For measuring this current, several possibilities exist, all having drawbacks.

25 In one possibility, a measuring resistance may be arranged in series with the inductor 4; however, this involves the drawback of increased dissipation. For measuring small current values, this may be found acceptable, but in cases with high currents, e.g. in the order of 50 A, the dissipation in a measuring resistor is unacceptable. Further, using a measuring resistor introduces a problem of galvanic insulation, which is needed to reference the DC level of the measurement signal to the measurement GND level.

30 In another possibility, a DC current transducer with a Hall-element or the like may be used; however, such devices are not fast enough. In a third possibility, an AC current transducer may be used; however, then no information regarding the DC level of the current is obtained.

In another approach, the coil current is not measured in the common coil branch between node A and output 6, but in each of the switch branches between the high voltage terminal 2 and node A on the one hand and between the low voltage terminal 3 and node A on the other hand. The coil current can be reconstructed from the two measured  
5 currents, since the coil current is a summation of the two switch currents, taking the current direction into account.

US-5.815.391 discloses a circuit embodying this approach. This measuring circuit comprises two AC current transformers associated with the respective switch branches. The outputs of the two AC current transformers are added together. Switching  
10 circuitry is provided for assuring that, during the period when a switch is non-conductive (off-period), the output signal from the corresponding AC current transformer does not contribute to the overall measuring output signal. This result is achieved by disconnecting the corresponding AC current transformer from a measuring resistor (Fig. 5 of the publication). In another embodiment, two Rogowski flux coils are used, of which the output voltages are  
15 integrated and summed. In this embodiment, said result is achieved by making the output of a corresponding integrator equal to zero (Fig. 6 of the publication) during the off-period.

This sensing circuit is only capable of measuring the DC level of the coil current if the integrator is reset at the right moment. Rogowski flux coils are typically bulky, expensive, and have a relatively limited frequency range.

20 Further, in the embodiment disclosed by the publication, the magnetizing current is driven to zero by a flyback voltage developed over a pair of clamping zener diodes. This will introduce inaccuracies in practical implementations. First, because the inductance of the AC current transformer will resonate with the parasitic capacitance of the secondary winding, so that the magnetizing current will not be driven to zero but will contain a sine-  
25 shaped current contribution. Second, the zener diodes will also show a certain leak-current that will introduce non-linearities.

It is a general objective of the present invention to overcome said  
30 disadvantages.

Specifically, it is an objective of the present invention to provide a measuring circuit and method capable of providing a measuring signal representing actual value of the coil current, i.e. the AC part as well as the DC part of the coil current.

Further, it is an objective of the present invention to provide a measuring circuit and method capable of accurately sensing current in a switched current path, where current is periodically switched between an unknown magnitude during a first part of a period and a predetermined fixed magnitude during a second part of the period.

5 According to an important aspect of the present invention, an offset signal is added to the measured current signal, the offset signal being chosen such that, during the off-state of a switch, the corresponding measurement signal is equal to zero. Then, during the on-state of such switch, the same offset is applied, so that the corresponding measurement signal accurately reflects the actual current.

10 These and other aspects, features and advantages of the present invention will be further explained by the following description of the present invention with reference to the drawings, in which same reference numerals indicate same or similar parts, and in which:

15 Fig. 1A is a block diagram schematically illustrating a half-bridge driver;

Fig. 1B is a graph schematically illustrating signal shapes at various locations in the half-bridge driver of Fig. 1A;

Fig. 2 is a block diagram schematically illustrating a current sensing circuit according to the present invention.

20 Fig. 2 is a block diagram schematically illustrating a current sensing circuit 50 comprising a first switch current measuring circuit 100 according to the present invention. The first switch current measuring circuit 100 comprises a current sensing stage 110 and an offset stage 150.

25 The current sensing stage 110 comprises a current sensor 120, in this embodiment an AC current transformer 120, having a primary winding 121 coupled in series with the first switch 11, and having a secondary winding 122 coupled in parallel to a measuring resistor 123, which has one terminal connected to a reference voltage level, in this case ground. At the opposite terminal of the measuring resistor 123, indicated as point X, a transformer output voltage signal is provided, which will be indicated as intermediate measuring voltage signal  $V_{HM}$ , and which has the same shape as the current  $I_H$  through the first switch 11 but a DC level  $V_{DCH}$  corresponding to the average current magnitude  $I_{AVH}$  of

current  $I_H$ . Normally, the average current magnitude  $I_{AVH}$  of the current  $I_H$  through the first switch 11 may be lower or higher than the DC level of the current  $I_4$  in coil 4.

Optionally, the current sensing stage 110 may comprise a buffer circuit 130, as shown.

5 It is noted that the intermediate measuring signal ( $V_{HM}$ ) corresponds to an AC part of said current ( $I_H$ ), although, depending on the embodiment of the current sensor, the intermediate measuring signal ( $V_{HM}$ ) may comprise a DC part, either caused by said current ( $I_H$ ) or, as an offset, caused by the sensor itself.

10 The intermediate measuring voltage signal  $V_{HM}$  is coupled to a first input 161 of an adder 160 of the offset stage 150, which comprises an offset generator 170 having an output 172 coupled to a second input 162 of the adder 160. The adder 160 has an output 163 providing a sum signal  $S_1$ . The offset generator 170 has a timing input 171 for receiving a signal indicating the off state of the first switch 11, i.e. the low state of the switch driver 13. In the embodiment shown, the timing input 171 of the offset generator 170 is coupled to the  
15 first output 14 of the switch driver 13. The offset generator 170 further has a feedback input 173 coupled to the output 163 of the adder 160.

The offset generator 170 is designed, during the off state of the first switch 11, to generate at its output 172 an auxiliary signal or offset signal  $V_{OFF,H}$  such that the output voltage at the output 163 of the adder 160, indicated at point Z, is equal to zero,  
20 corresponding to the fact that during this off state the current  $I_H$  through the first switch 11 is equal to zero.

The offset generator 170 is further designed, during the on state of the first switch 11, to generate at its output 172 the same offset signal  $V_{OFF,H}$  as determined during the previous off state period. As a result, the shape of the adder output signal  $S_1$  is an accurate  
25 representation of the current  $I_H$  in the first switch 11.

In an exemplary embodiment, the offset generator 170 may comprise a control loop for regulating the offset signal  $V_{OFF,H}$  during the off state of the first switch 11 in combination with a sample-and-hold circuit for holding the offset signal  $V_{OFF,H}$  during the on state of the first switch 11, as will be clear to a person skilled in the art.

30 Optionally, the offset stage 150 may comprise a buffer circuit 180, as shown.

It is noted that, for some applications, it is sufficient to have a measuring signal accurately reflecting the current in one switch only. Therefore, the switch current measuring circuit 100 is to be considered an embodiment of the present invention.

The current sensing circuit 50 of Fig. 2 is intended to provide a measuring signal accurately reflecting the current in coil 4. Therefore, according to the present invention, the current sensing circuit 50 comprises a second switch current measuring circuit 200 which preferably has an identical design as the first switch current measuring circuit 100.

5 In Fig. 2, components of the second switch current measuring circuit 200 are indicated with the same reference numerals as the corresponding components of the first switch current measuring circuit, increased by 100.

The primary winding 221 of the AC current transformer 220 of the second switch current measuring circuit 200 is coupled in series with the second switch 12, and the  
10 timing input 271 of the second offset generator 270 is coupled to the second output 15 of the switch driver 13. The operation of the second switch current measuring circuit 200 is similar as the operation of the first switch current measuring circuit 100, *mutatis mutandis*, so it is not necessary to repeat the explanation of the operation thereof. At its output, the second switch current measuring circuit 200 provides a measuring signal  $S_2$  accurately reflecting the  
15 current  $I_L$  in the second switch 12.

The current sensing circuit 50 further comprises an adder 300, having inputs 301 and 302 coupled to the outputs of the first and second switch current measuring circuits 100 and 200, respectively, and having an output 303 providing an output signal  $S_3$  which is the summation of the measuring signals provided by the first and second switch current  
20 measuring circuits 100 and 200; this output signal  $S_3$  accurately reflects the current in coil 4.

It should be clear to a person skilled in the art that the present invention is not limited to the exemplary embodiments discussed above, but that several variations and modifications are possible within the protective scope of the invention as defined in the appending claims.

25 For instance, instead of an implementation on the basis of voltage signals, it is also possible to construct an implementation on the basis of current signals.

Further, the timing signals indicating the ON/OFF state of corresponding switches can be obtained from other sources than the switch driver outputs 14 and 15.

The invention is not restricted to the half-bridge implementation of Fig. 2; the  
30 principle underlying the invention is also applicable in the case of a full-bridge implementation.

In the above, the present invention has been explained with reference to an embodiment having two switches connected in series, allowing the current to change direction. However, the invention is not restricted to such implementation; the principle



underlying the invention is also applicable in the case of a buck implementation, wherein one of the switches (for instance: 12) is replaced by a diode, as will be clear to a person skilled in the art.

In the above, the present invention has been explained with reference to a  
5 current sensing stage comprising an AC current transformer. Instead, other types of current sensors may be used, for instance magneto-resistive sensors or Hall sensors. Such sensors are capable of measuring DC current, but have a relatively large intrinsic offset; this applies especially to magneto-resistive sensors. Such intrinsic offset can also be corrected by the method proposed by the present invention.

10 In the above, the present invention has been explained with reference to block diagrams, which illustrate functional blocks of the device according to the present invention. It is to be understood that one or more of these functional blocks may be implemented in hardware, where the function of such functional block is performed by individual hardware components, but it is also possible that one or more of these functional blocks are  
15 implemented in software, so that the function of such functional block is performed by one or more program lines of a computer program or a programmable device such as a microprocessor, microcontroller, etc.

Specifically, at point X, the signal can be made digital by an AD converter, and all further processing can be done in software.

## CLAIMS:

1. Method for measuring a switched current ( $I_H$ ) which is periodically switched on and off, and providing a measuring signal (S1) accurately reflecting said current ( $I_H$ ), the method comprising the steps of:

- sensing said switched current ( $I_H$ ) with a current sensor (120) to obtain an intermediate measuring signal ( $V_{HM}$ ) corresponding to an AC part of said current ( $I_H$ );

- receiving a timing signal indicating the on and off periods of the switched current ( $I_H$ );

- during an off period, generating an auxiliary signal ( $V_{OFF,H}$ ) such that the sum of said intermediate measuring signal and said auxiliary signal is equal to zero;

- during an on period, adding said intermediate measuring signal and said auxiliary signal and providing the sum signal as output measuring signal (S1).

2. Method according to claim 1, wherein the timing signal is a switch control signal.

3. Method for measuring a switched bridge current ( $I_4$ ) and for providing a measuring signal (S3) accurately reflecting said current ( $I_4$ ), said switched bridge current ( $I_4$ ) being periodically switched between a first current source and a second current source in a bridge (1) which comprises a first branch (21) providing a first switched current ( $I_H$ ) corresponding to the first current source and a second branch (22) providing a second switched current ( $I_L$ ) corresponding to the second current source, the method comprising the steps of:

- providing a first measuring signal (S1) reflecting the first switched current ( $I_H$ ) using a method according to claim 1;

- providing a second measuring signal (S2) reflecting the second switched current ( $I_L$ ) using a method according to claim 1;

- adding the first and second measuring signals.

4. Switch current measuring circuit (100) for measuring a current ( $I_H$ ) in a switch (11) and providing a measuring signal ( $S_1$ ) accurately reflecting said current ( $I_H$ ), the circuit comprising a current sensing stage (110) for providing an intermediate measuring signal ( $V_{HM}$ ) corresponding to an AC part of said current ( $I_H$ ), and an offset stage (150) for adding  
5 an offset ( $V_{OFF,H}$ ) to the intermediate measuring signal ( $V_{HM}$ ).
5. Switch current measuring circuit according to claim 4, wherein the current sensing stage (110) comprises an AC current transformer (120) having a primary winding (121) for sensing the current ( $I_H$ ) to be measured, and having a secondary winding (122)  
10 providing an intermediate measuring signal ( $V_{HM}$ ).
6. Switch current measuring circuit according to claim 5, further comprising a measuring resistor (123) coupled in parallel to the secondary transformer winding (122).
- 15 7. Switch current measuring circuit according to claim 4, wherein the offset stage (150) comprises an adder (160) having a first input (161) coupled to receive the intermediate measuring signal provided by the current sensing stage (110), and having a second input (162) coupled to an output of an offset generator (170), and having an output (163) for providing the output measuring signal ( $S_1$ ).
- 20 8. Switch current measuring circuit according to claim 7, wherein the offset generator (170) has a timing input (171) for receiving a signal indicating a current off period, and wherein the offset generator (170) further has a feedback input (173) coupled to the output (163) of the adder (160).
- 25 9. Switch current measuring circuit according to claim 8, wherein the timing input (171) of the offset generator (170) is coupled to a control input of the first switch (11).
10. Switch current measuring circuit according to claim 7, wherein the offset  
30 generator (170), during an off period of the current ( $I_H$ ), is designed to generate an auxiliary signal ( $V_{OFF,H}$ ) such that the sum of said intermediate measuring signal ( $V_{HM}$ ) and said auxiliary signal ( $V_{OFF,H}$ ) is equal to zero; wherein the offset generator (170), during an on period, is designed to add said intermediate measuring signal ( $V_{HM}$ ) and said auxiliary signal ( $V_{OFF,H}$ ) and to provide the sum signal ( $S_1$ ) as output measuring signal.



11. Current sensing circuit (50) for measuring a switched bridge current ( $I_L$ ) and for providing a measuring signal (S3) accurately reflecting said current ( $I_L$ ), said switched bridge current ( $I_L$ ) being periodically switched between a first current direction and a second current direction in a bridge (1) which comprises a first branch (21) providing a first switched current ( $I_H$ ) corresponding to the first current direction and a second branch (22) providing a second switched current ( $I_L$ ) corresponding to the second current direction; the circuit (50) comprising:
- a first switch current measuring circuit (100) according to claim 4, associated with said first branch (21);
  - a second switch current measuring circuit (200) according to claim 4, associated with said second branch (22);
  - an adder (300) for adding the output signals (S1, S2) of the first and second switch current measuring circuits.
12. Inverter circuit, comprising a current sensing circuit according to claim 11.
13. Converter circuit, comprising a current sensing circuit according to claim 11.
14. Pulse width modulated circuit, comprising a current sensing circuit according to claim 11.

**ABSTRACT:**

For measuring a switched current ( $I_H$ ) which is periodically switched on and off, and for providing a measuring signal accurately reflecting said current ( $I_H$ ), a method according to the invention comprises the steps of:

- 5       - sensing said switched current ( $I_H$ ) with an AC current transformer (120) to obtain an intermediate measuring signal ( $V_{HM}$ );
- receiving a timing signal indicating the on and off periods of the switched current ( $I_H$ );
- during an off period, generating an auxiliary signal such that the sum of said intermediate measuring signal and said auxiliary signal is equal to zero;
- 10       - during an on period, adding said intermediate measuring signal and said auxiliary signal and providing the sum signal as output measuring signal.

Fig. 2

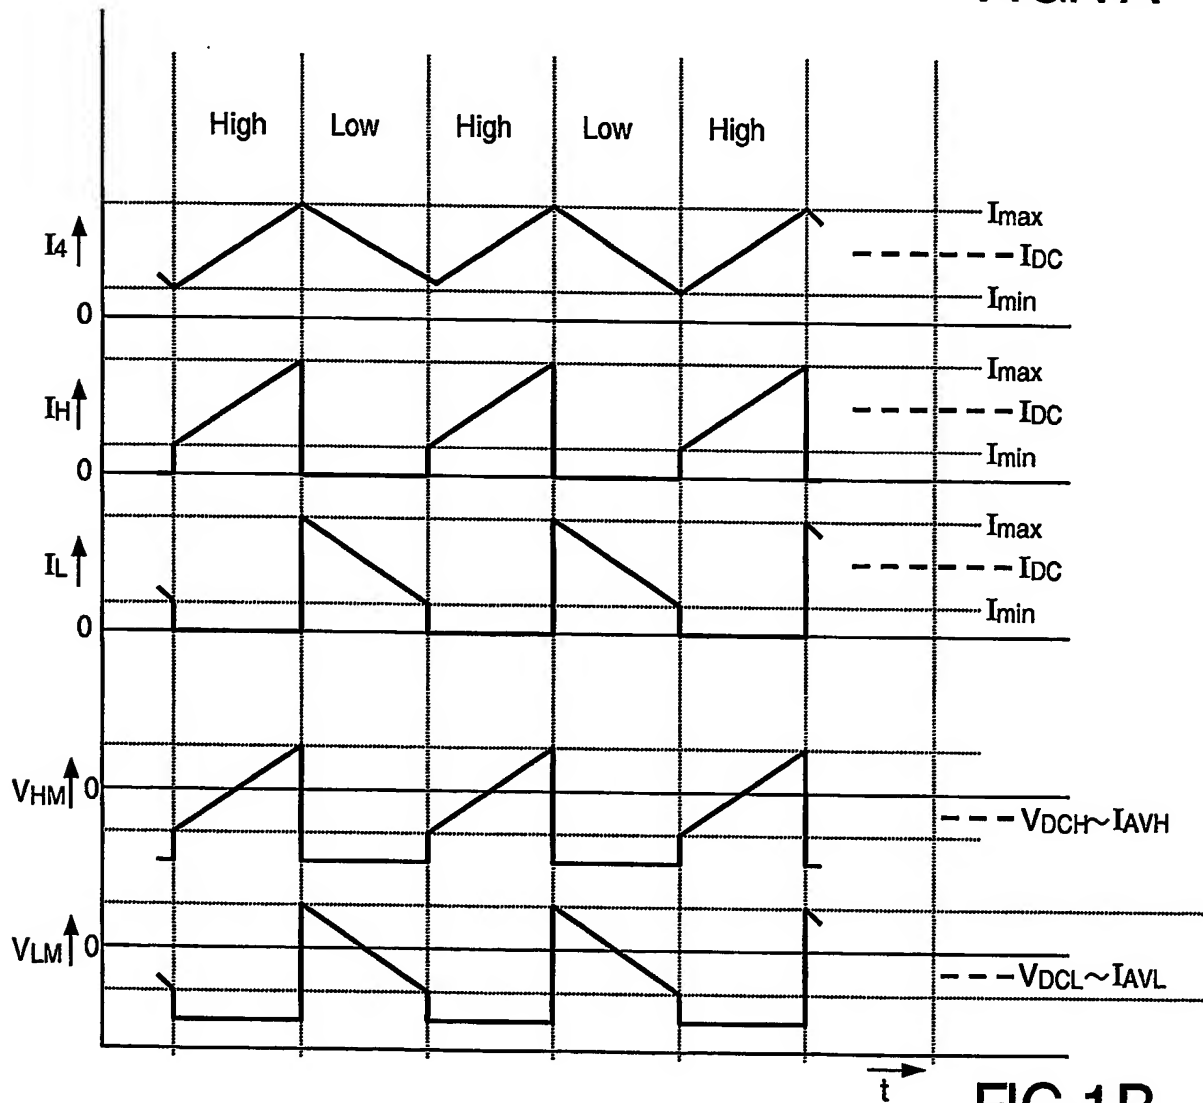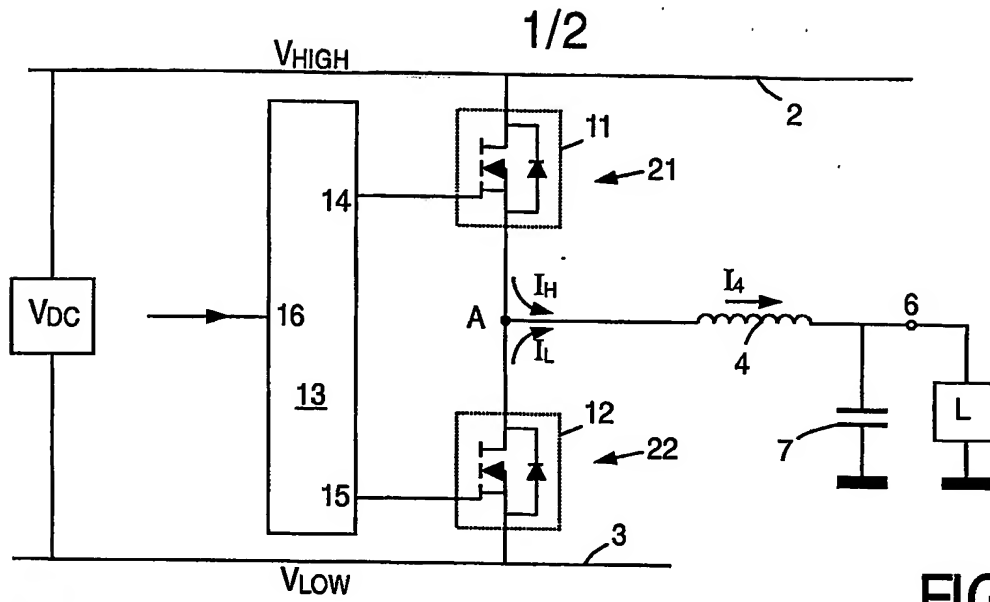

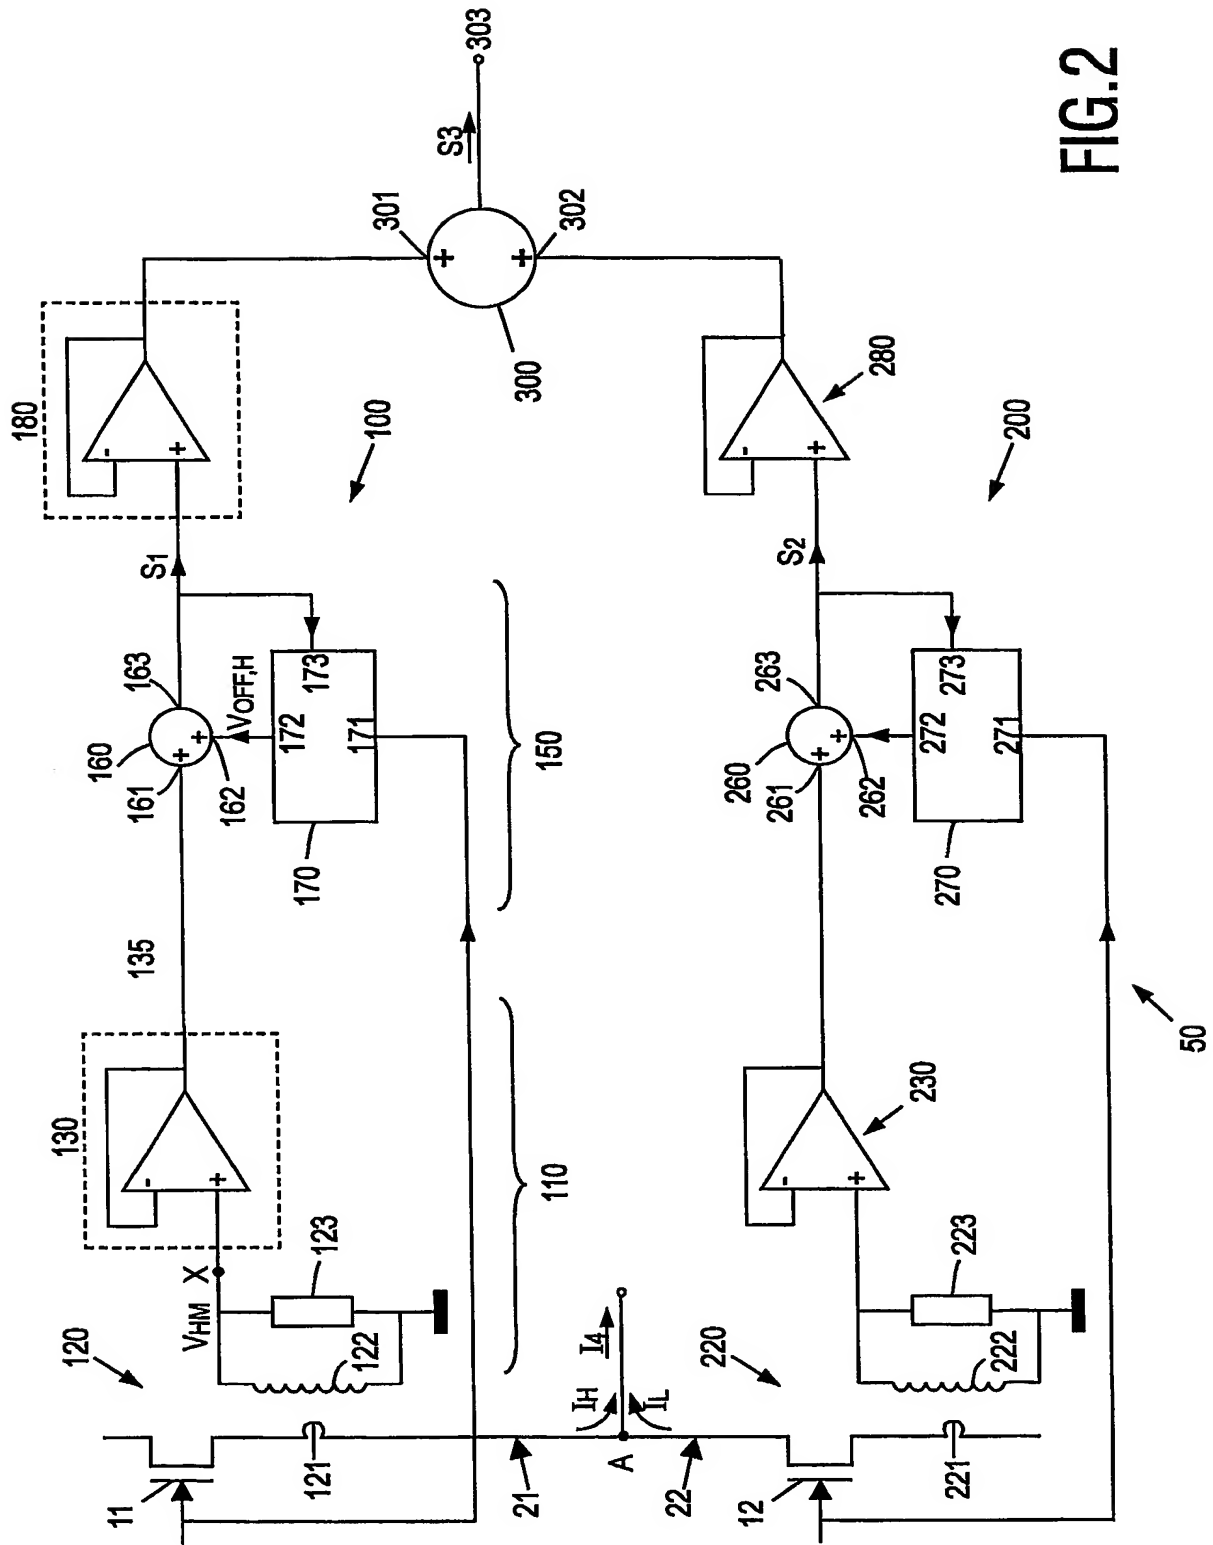


FIG.2